


T means with Tweeter


MODEL	CM-506T	CM-610T
Power at 100V	3W	6W
Power at 70V	1.5W	3W
SPL(1W/1M)	91dB	92dB
Max SPL@ 1M	98dB	101 dB
Freq. Response	100Hz-13KHz	100Hz-17KHz
Cutout Size	Dia 175mm	Dia 220mm
Product Size	Dia 200x65mm(H)	Dia 245x69mm(H)
Installation	Inceiling	Inceiling
Enclosure Material	Metal	Metal
Weight	0.75Kg	1Kg
Finish	White	White
Speakers	1" x1 (TREBLE) 5"x1(BASS)	1" x1 (TREBLE) 6"x1(BASS)

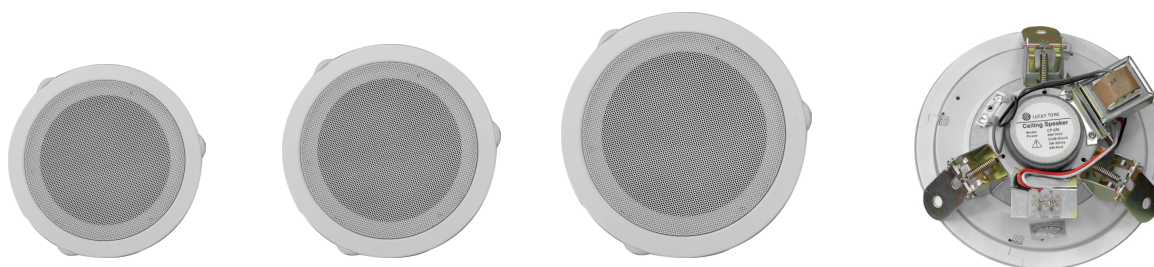

MODEL	CM-406M	CM-506M	CM-606M
Power at 100V	3W	3W	6W
Power at 70V	1.5W	1.5W	3W
SPL(1W/1M)	91dB	91dB	91dB
Max SPL@ 1M	98dB	98dB	98dB
Freq. Response	100Hz-13KHz	100Hz-13KHz	100Hz-17KHz
Cutout Size	Dia 155mm	Dia 175mm	Dia 220mm
Product Size	Dia 180x50mm(H)	Dia 200x65mm(H)	Dia 245x69mm(H)
Installation	Inceiling	Inceiling	Inceiling
Enclosure Material	Metal	Metal	Metal
Weight	0.65Kg	0.7Kg	0.95Kg
Finish	White	White	White
Speakers	4.5" x1 full range	5.5" x1 full range	6.5" x1 full range