

DMX SPLITTER II

CA-DS18 II



Acme

DMX SPLITTER 18 II



Main Features

- 1 x DMX input + 8 x DMX outputs
- All in/outputs are opto-isolated with withstanding voltage >2,000V
- Fully controlled by DMX-512
- Buffer, magnify, distribute DMX signal effectively

Electrical and Connectors

- Input voltage range: 120-230Vac; 50/60Hz
- Power consumption: 10W
- Data in/out: 3-pin or 5-pin XLR

Fixture Specification

- Fixture Dimensions:
483 x 145 x 45 mm (19.0" x 5.7" x 1.8")
- Weight: 2.0 kg (4.4 lbs)


Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C

Installation

- Suitable for standard 19" cabinet (1U)
- Safety cable attachment point

Signal connection diagram

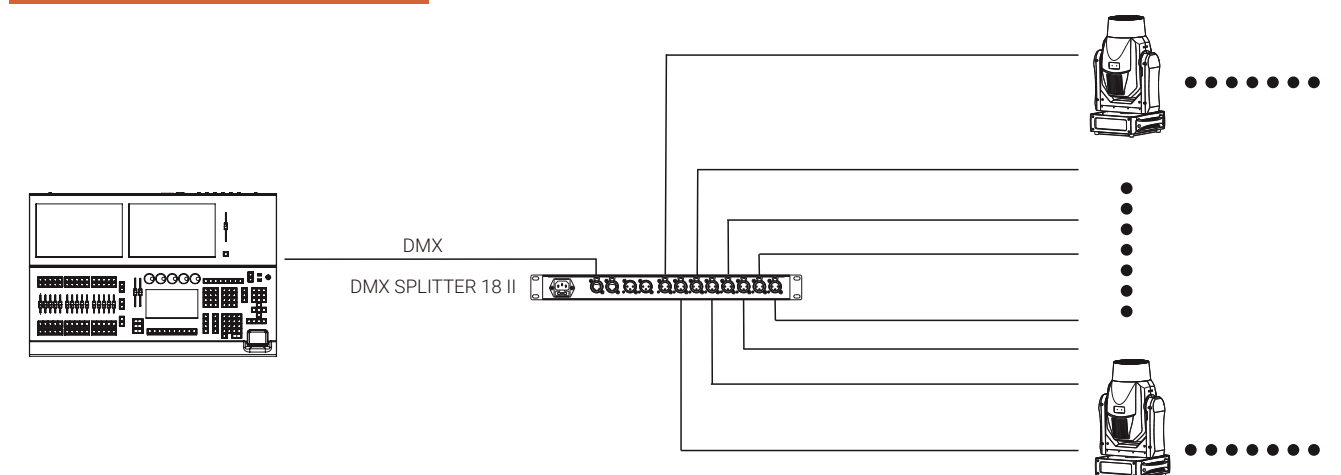

Specifications subject to change without notice.
03/31/2025