


GINAMP

STROBE 2

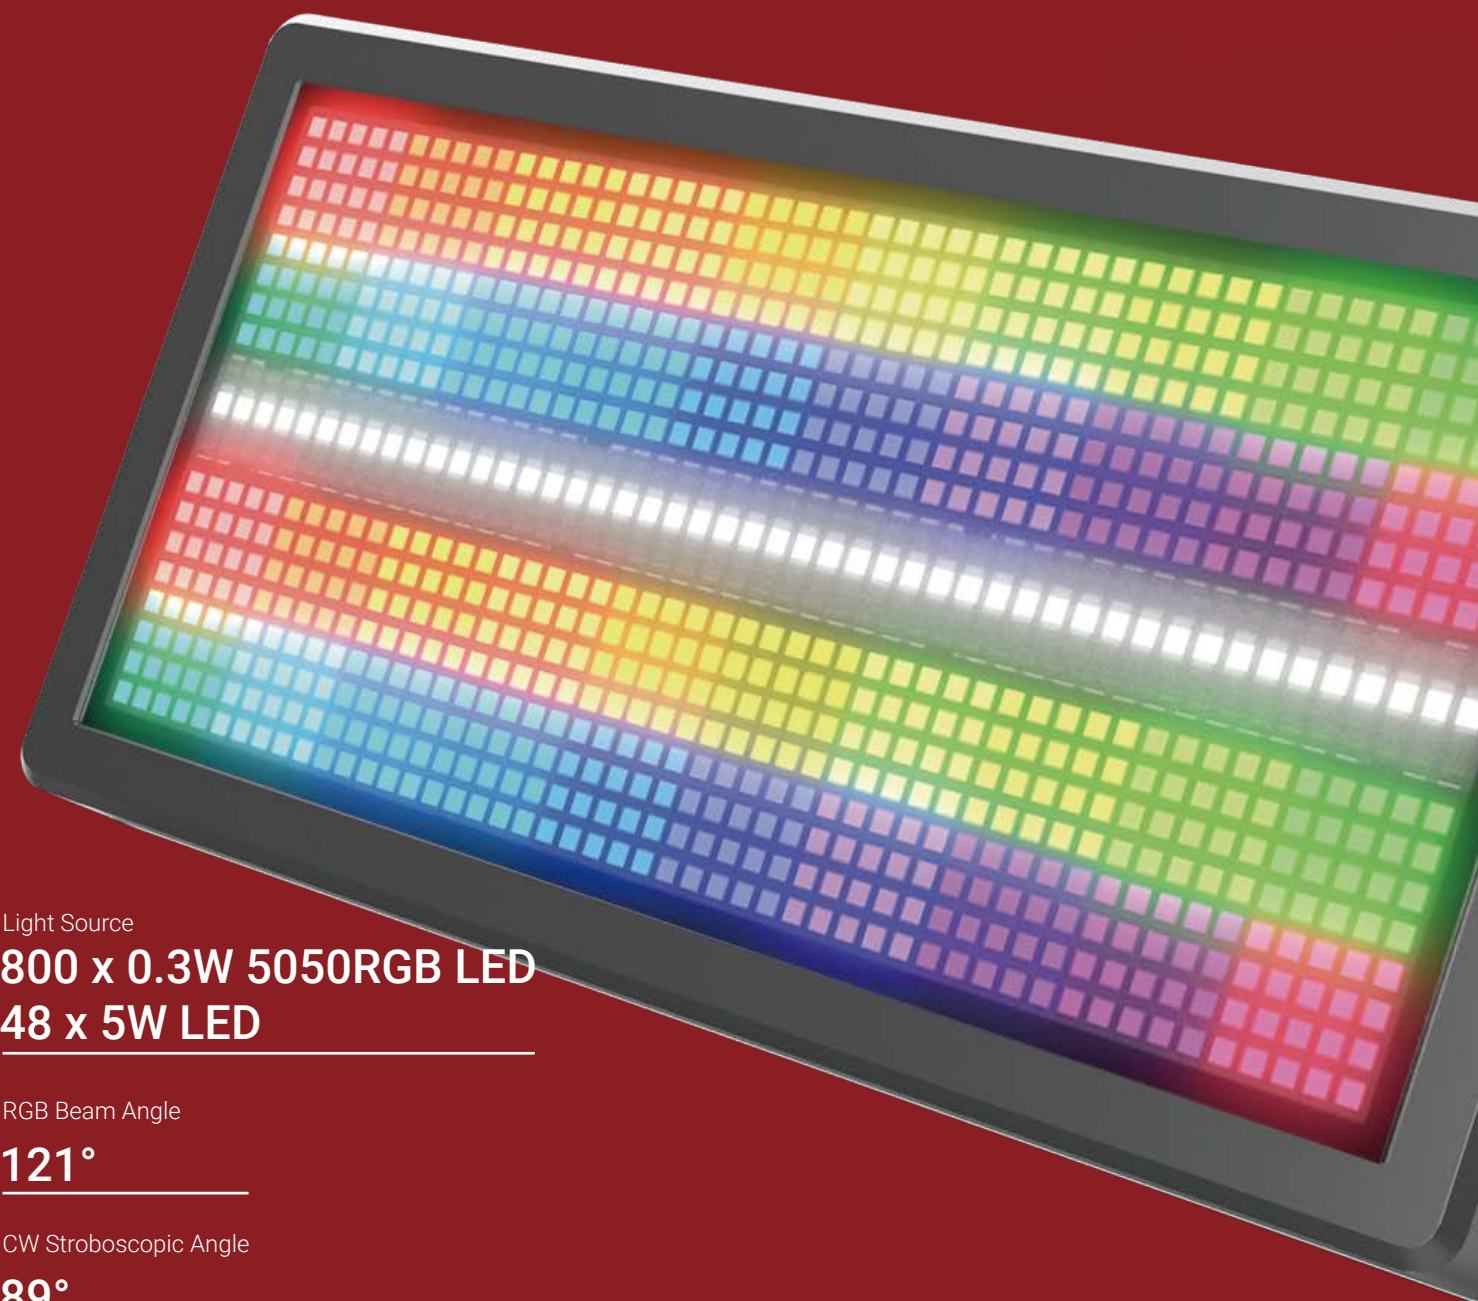

Light Source
800 x 0.3W 5050RGB LED
48 x 5W LED

RGB Beam Angle

121°

CW Stroboscopic Angle

89°

Acme

GINAMP



Main Features

Light Source: 800 x 0.3W 5,050RGB

48 x 5W LED

RGB Beam Angle: 121°

CW Stroboscopic Angle: 89°

40 LED zones can be controlled individually,

6 LED zones can be controlled in stroboscopic zone


Outstanding strobe effect with variable speed

Small size, light weight

Smooth dimming 0-100%

Flicker free management

Technical Specifications

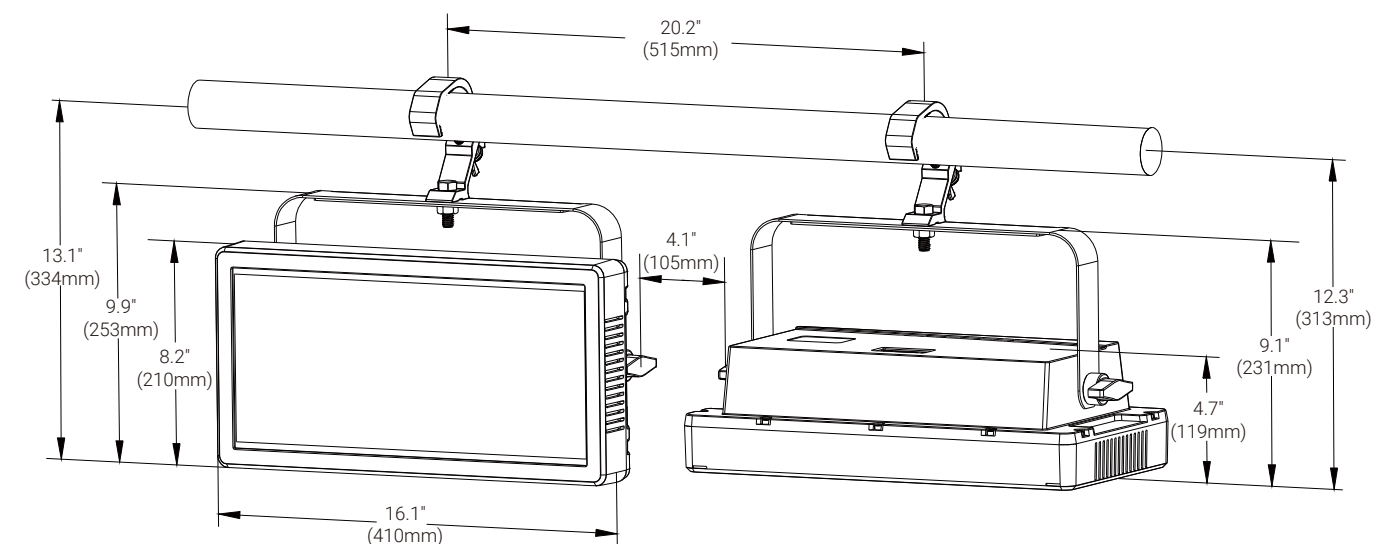

Light Source

- Light Source: 800 x 0.3W 5,050RGB
48 x 5W LED
- Life Expectancy: 20,000 hours*

*Source manufacturer specification

Optical system

- RGB Beam Angle: 121°
- CW Stroboscopic Angle: 89°

Other Effects

- RGB color mixing
- 40 LED zones can be controlled individually,
6 LED zones can be controlled in stroboscopic zone
- High brightness
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%

Control

- 4 touch button control panel
- Display: OLED display
- Control Mode: DMX512, RDM
- DMX Protocol Modes: 6/13/18/36/126/131
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 325W
- Power In/Out: power connector in/out (TRUE1 type)
- Data In/Out: 3-pin or 5-pin XLR

Physical Information

- Fixture Dimensions:
410 x 210 x 120 mm (16.1" x 8.3" x 4.7")
Weight: 5.3 kg (11.7 lbs)

Packing Information

- Carton Dimension:
505 x 285 x 210 mm (19.9" x 11.2" x 8.3")
Weight: 6.2 kg (13.7 lbs) (one-pack loader carton)


Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C

Installation

- Horizontal or vertical mounting
- Universal working position
- 1 locked points in the handle
- 1 clamp for 50 mm truss
- Safety cable attachment point

Photometric (Images)

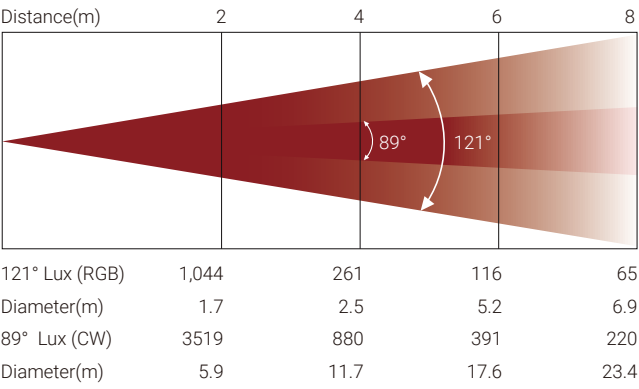

Specifications subject to change without notice.
06/06/2025