


## Dante I/O

### Dante 2 in 2 out Transmitter Dante 2by2i/ Dante 2by2i POE

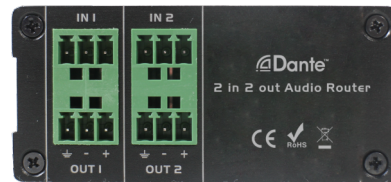

Model with "POE" comes with a POE splitter

#### Features:

- Ideal interface to increase the number of AUX inputs
- 2 balanced line outputs can be used simultaneously, and all audio channels are used with Dante network.
- 2 balanced AUX inputs, and also 2 outputs using phoenix connector
- CAT5/6 connector to link with Dante network and controlled by Audinate
- Small size integrated mounting bracket which can be installed in very limited space

#### SPECIFICATIONS

|                    | Dante 2by2i/ Dante 2by2i POE |
|--------------------|------------------------------|
| Input              | 2 balanced/unbalanced input  |
| Input Impedance    | 10K Ohm                      |
| Max. Input Level   | +2dB                         |
| Output             | 2 balanced/unbalanced output |
| Output Impedance   | 10K Ohm                      |
| Max. Output Level  | +2dB                         |
| Freq. Response     | 20~20KHz, $\pm 1$ dB         |
| THD                | 0.01%                        |
| Power Requirements | 12V DC 12V DC or POE         |
| Dimensions         | 123x75x35 mm                 |

### Dante 4 in 4 out Transmitter Dante 4by4i/ Dante 4by4i POE



Model with "POE" comes with a POE splitter

#### Features:

- Ideal interface to increase the number of AUX inputs
- 4 balanced line outputs can be used simultaneously, and all audio channels are used with Dante network.
- 4 balanced AUX inputs, and also 4 outputs using phoenix connector
- CAT5/6 connector to link with Dante network and controlled by Audinate
- Small size integrated mounting bracket which can be installed in very limited space

#### SPECIFICATIONS

|                    | Dante 4by4i/ Dante 4by4i POE |
|--------------------|------------------------------|
| Input              | 4 balanced/unbalanced input  |
| Input Impedance    | 10K Ohm                      |
| Max. Input Level   | +2dB                         |
| Output             | 4 balanced/unbalanced output |
| Output Impedance   | 10K Ohm                      |
| Max. Output Level  | +2dB                         |
| Freq. Response     | 20~20KHz, $\pm 1$ dB         |
| THD                | 0.01%                        |
| Power Requirements | 12V DC 12V DC or POE         |
| Dimensions         | 123x75x35 mm                 |