



Out Door Column Speaker

IP 44 for outdoor use

Features:

- ▶ Heavy duty aluminum column speaker for outdoor application with high IP rating.
- ▶ Excellent frequency response
- ▶ 70-100V transformer input



Bottom



LM-510T



LM-520T



LM-530T



LM-540T



MODEL	LM-510T	LM-520T	LM-530T	LM-540T
Power at 100V	5/10W	10/20W	15/30W	20/40W
Power at 70V	2.5/5W	5/10W	7.5/15W	10/20W
SPL(1W/1M)	91dB	91dB	92dB	92dB
Max SPL@ 1M	100dB	103dB	104dB	107dB
Freq. Response	130Hz-16KHz	130Hz-16KHz	130Hz-18KHz	130Hz-16KHz
Dispersion Angel	90x90 degree	90x90 degree	90x80 degree	90x80 degree
Product Size	270x115x150mm	390x115x150mm	505x115x150mm	620x115x150mm
Installation	Wall mounted	Wall mounted	Wall mounted	Wall mounted
Enclosure Material	Aluminum	Aluminum	Aluminum	Aluminum
Weight	2.6Kg	4.1Kg	4.4Kg	5Kg
Finish	Light Grey	Light Grey	Light Grey	Light Grey
Speakers	1" x1 (TREBLE) 4"x1(BASS)	1" x1 (TREBLE) 4"x2(BASS)	1" x1 (TREBLE) 4"x3(BASS)	1" x1 (TREBLE) 4"x4(BASS)

Out Door Column Speaker

IP 44 for outdoor use

Features:

- ▶ Heavy duty aluminum column speaker for outdoor application with high IP rating.
- ▶ Excellent frequency response,
- ▶ Suitable for both background music and paging.

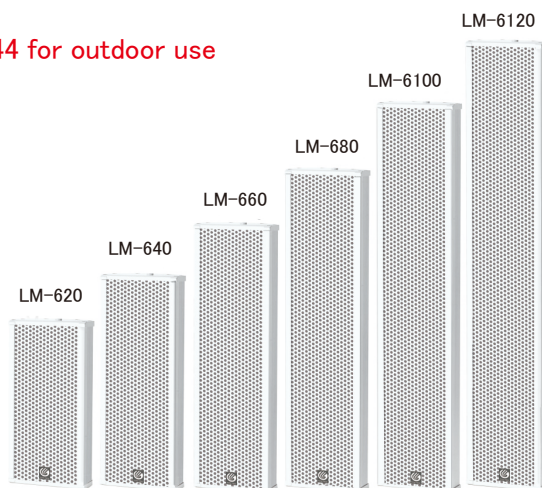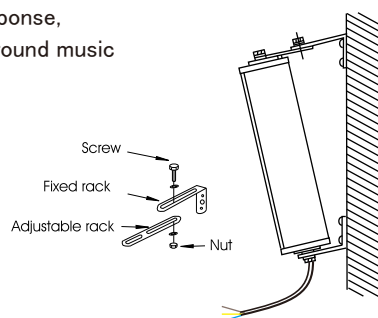

MODEL	LM-620	LM-640	LM-660	LM-680	LM-6100	LM-6120
Power at 100V	10/20W	20/40W	30/60W	40/80W	50/100W	60/120W
Power at 70V	5/10W	10/20W	15/30W	20/40W	25/50W	30/60W
SPL(1W/1M)	93dB	93dB	94dB	95dB	96dB	96dB
Max SPL@ 1M	105dB	108dB	112dB	116dB	117dB	118dB
Freq. Response	130Hz-16KHz	130Hz-16KHz	130Hz-16KHz	130Hz-16KHz	130Hz-16KHz	130Hz-16KHz
Dispersion Angel	80x100 degree	80x100 degree	80x100 degree	80x100 degree	80x100 degree	80x100 degree
Product Size	304x227x125mm	520x227x125mm	736x227x125mm	952x227x125mm	1168x227x125mm	1384x227x125mm
Installation	Wall mounted	Wall mounted	Wall mounted	Wall mounted	Wall mounted	Wall mounted
Enclosure Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Weight	3.2Kg	5Kg	6.8Kg	8.6Kg	10.5Kg	12.5Kg
Finish	White	White	White	White	White	White
Speakers	6"x1 Full range	6"x2 Full range	6"x3 Full range	6"x4 Full range	6"x5 Full range	6"x6 Full range