

TrussHub U

AN04T



Acme

TRUSSHUB U



Main Features

Art-Net to DMX-512 (RDM) signal splitter
 Supports standard DMX512, RDM, Art-Net and sACN protocol
 1x RJ45 input, 1x RJ45 output, 4x DMX output
 Available for 40/50/60mm diameter truss
 Shock-absorbing design with rubber edging on both sides
 Includes two straps to securely attach to truss
 Protection Rating: IP66

Electrical and Connectors

Power supply with electronic auto-ranging
 Display: OLED display
 Input Voltage Range: 100-240Vac; 50/60Hz
 Power Consumption: 5W
 Power In/Out: Power cord out
 Data In/Out: 3-pin or 5-pin IP XLR, RJ45 connector


Fixture Specification

- Fixture Dimensions:
173 x 145 x 142 mm (6.8" x 5.7" x 5.6")
Weight: 2.0 kg (4.4 lbs)
- Carton Dimensions:
420 x 295 x 475 mm (16.5" x 11.6" x 18.7")
Weight: 10.2 kg (22.5 lbs)(Four-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP66

Signal connection diagram

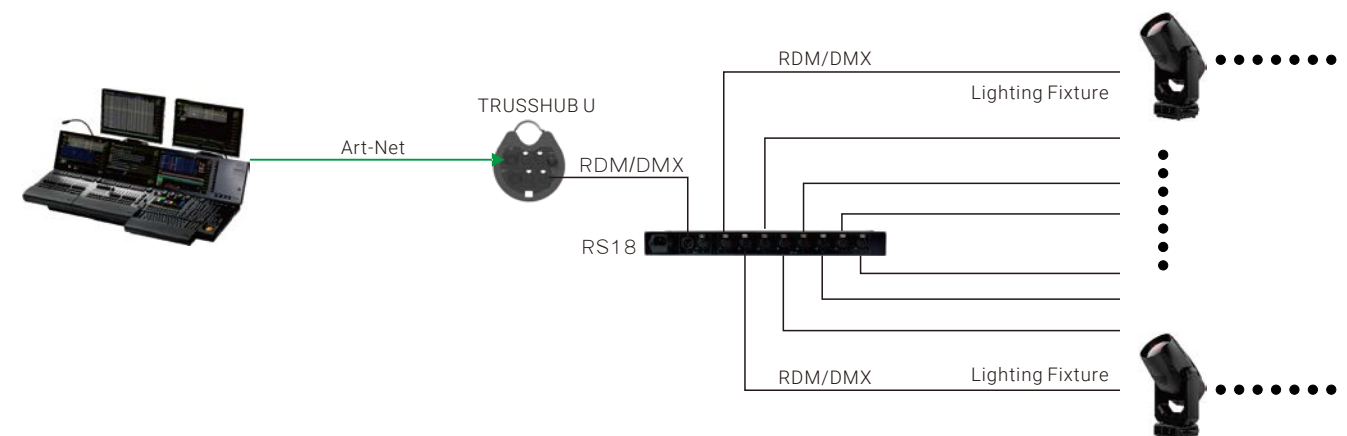

Specifications subject to change without notice.