DXP H0104




Key Features

- Support 12G SDI/6G SDI/3G-SDI/HD-SDI/SD-SDI
- 1 input & 4 outputs
- Support various serial digital video signals
- Rate up to 12 Gb/s
- Built-in cable automatic equalizer & clock and data recovery
- Support embedded audio and auxiliary data
- Plug-and-play, support hot swap
- Sturdy frame with high durability

Specification

Connectors	Input	12G-SDI 1xBNC
	Output	12G-SDI 4xBNC
Performance	Video Formats	3840x2160p@60/59.94/50/30/29.97/25/24/23.98 1080p: 60/59.94/50/30/29.97/25/24/23.98 1080i@60/59.94/50 720p@60/59.94/50 525i@59.94 NTSC 625@i50 PAL
	Supported Standard	SDI SD/HD/3G/6G/12G-SDI
Power	Input Voltage	DC 12V/2A
Operating Environment	Temperature	0℃～40℃
	Humidity	0%~90%, RH
Storage Environment	Humidity	-20%~45%, RH
Physical	Weight	0.8kg
	Dimension	109mmx103mmx28mm

Application

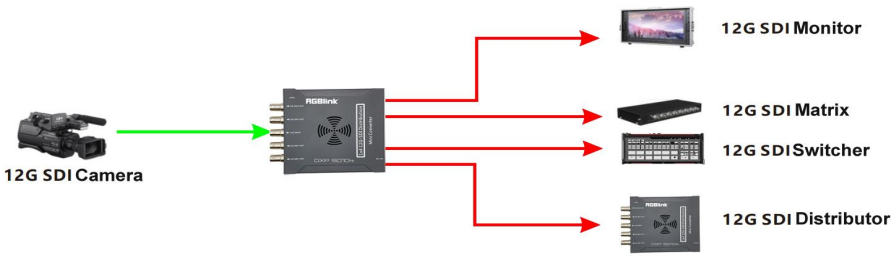

Order Codes

Product Code	Item
622-0104-01-0	DXP S0104

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink®
www.rgblink.com