

FLEX L Series

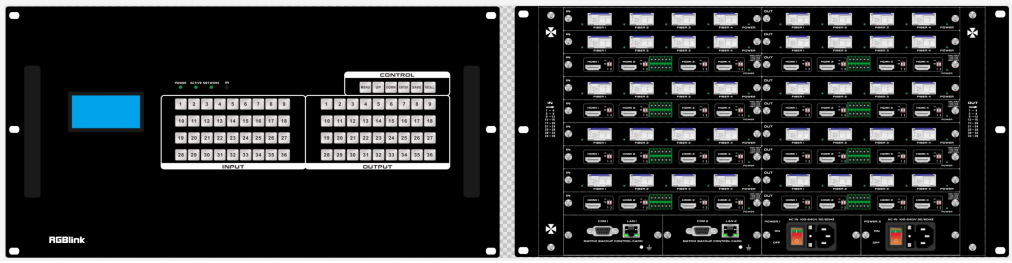

Key Features

- Support signal switch among CVBS/YPbPr/VGA/ HDMI/DVI/HDBaseT/Fiber
- Support 4K@60 Input&Output
- Seamless switch without being black/blue/cracked screen
- Control via Web/APP/RS232/IR
- 7-inch touch screen control
- Centralized cross-platform controls up to 254 devices
- Support dual power module supply and backup

Application

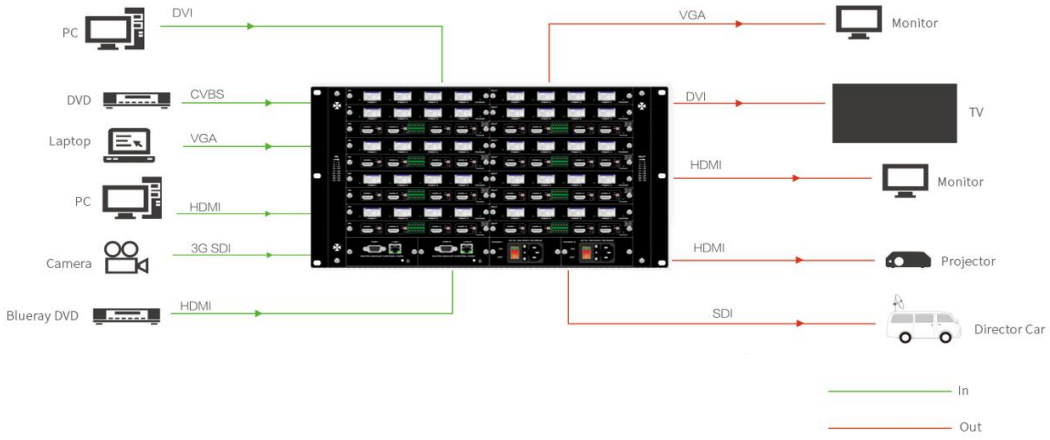

Order Codes

Product Code	Item
710-0018-02-0	FLEX 08L(MINI)
710-0018-03-0	FLEX 16L(MINI)
710-0018-04-0	FLEX 36L(MINI)
710-0018-05-0	FLEX 80L(MINI)
710-0018-06-0	FLEX 160L(MINI)
790-0018-18-0	Quad HDMI Input Module
790-0018-20-0	Quad VGA Input Module
790-0018-22-0	Quad CVBS Input Module
790-0018-23-0	Quad 3G SDI Input Module
790-0018-24-0	Quad HDBaseT Input Module (70m)
790-0018-25-0	Quad HDBaseT Input Module (100m)
790-0018-26-0	Quad HDMI Output Module
790-0018-27-0	Quad DVI Output Module
790-0018-28-0	Quad VGA Output Module
790-0018-29-0	Quad CVBS Output Module
790-0018-30-0	Quad 3G SDI Output Module

Product Code	Item
790-0018-31-0	Quad HDBaseT Output Module(70m)
790-0018-32-0	Quad HDBaseT Output Module(100m)
790-0018-33-0	Quad 4K60 HDMI Input Module
790-0018-35-0	H.264/265 Decoding Module
790-0018-36-0	H.264/265 Encoding Module
790-0018-37-0	Quad 4K60 Split Screen Output Module
790-0018-38-0	Network Center Module
790-0018-45-0	Quad 12G SDI Input Module
790-0018-46-0	Quad 12G SDI Output Module
790-0018-47-0	Quad 4K HDBaseT Input Module(40m)
790-0018-48-0	Quad 4K HDBaseT Input Module(70m)
790-0018-51-0	Quad 4K Fiber Input Module(2km)
790-0018-53-0	Quad 4K HDMI Output Module
790-0018-54-0	Quad 4K HDBaseT Output Module(40m)
790-0018-55-0	Quad 4K HDBaseT Output Module(70m)
790-0018-56-0	Quad 4K Fiber Output Module(2km)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgblink.com

Specification

Model		FLEX 08L(MINI)	FLEX 16L(MINI)	FLEX 36L(MINI)	FLEX 80L(MINI)	FLEX 160L(MINI)
Specification		8x8	16x16	36x36	80x80	160x160
Input Slots		2	4	9	20	40
Output Slots		2	4	9	20	40
Physical	Net Weight	6kg	13kg	16.8kg	35kg	45kg
	Net Dimension	482 mm × 405mm × 89mm	482mm x 405mm x 138mm	480 mm × 405mm × 264mm	482mm x 712mm x 390mm	482mm x 465mm x 1400mm
Connectors	Input	*Select From* HDMI Module 4 × HDMI-A DVI Module 4 × DVI-I (compatible with DVI, VGA, YPbPr, CVBS) VGA Module 4 × DB15 CVBS Module 4 × CVBS SDI Module 8 × BNC(4 In | 4 Loop) HDBaseT Module 4 × RJ45				
	Output	*Select From* HDMI Module 4 × HDMI-A DVI Module 4 × DVI-I (compatible with DVI, VGA, YPbPr, CVBS) VGA Module 4 × DB15 CVBS Module 4 × CVBS SDI Module 8 × BNC(4 Out | 4 Loop) HDBaseT Module 4 × RJ45				
	Communication	LAN 2 × RJ45 RS232 2 × RJ11				
	Power	2 × IEC				
Performance	Input Resolution	HDMI 2.0 SMPTE 720p@50/60 | 1080p@50/60 VESA 1024×768@60 | 1366×768@60 | 1920×1200@60 | 3840×2160@50/60 | 4096×2160@30/50/60 1 2 G SDI SMPTE 720p@60 | 1080p@50/60| 3840×2160@50/60 DVI | VGA | HDMI 1.3 SMPTE 720p@60 | 1080p@50/60 VESA 1024×768@60 | 1360×768@60 | 1920×1200@60				
	Output Resolution	HDMI 2.0 SMPTE 720p@50/60 | 1080p@50/60 VESA 1024×768@60 | 1366×768@60 | 1920×1200@60 | 3840×2160@50/60 | 4096×2160@30/50/60 HDBaseT SMPTE 720p@50/60|1080p@30/50/60|2160p@30 VESA 800×600@60 | 1024×768@60 | 1280×720@60 | 1280×800@60 | 1280×1024@60 | 1360×768@60 | 1366×768@60 | 1440×900@60 | 1400×1050@60 | 1600×1200@60 | 1680×1050@60 | 1920×1080@60 | 1920×1200@60 | 3840×2160@30 1 2 G SDI SMPTE 720p@60 | 1080p@50/60| 3840×2160@50/60 DVI | VGA | HDMI 1.3 |CVBS SMPTE 720p@24/25/30/50/60 | 1080p@24/25/30/50/60 VESA 800×600@60/75 | 1024×768@60 | 1280×720@24/25/30/50/60 | 1280×800@60 | 1280×1024@60 | 1360×768@60 | 1366×768@60 | 1400×1050@60 | 1440×900@60 | 1440×900@60 | 1600×1200@60 | 1680×1050@60 | 1920×1200@60				
	Supported Protocol	HDMI 2.0| 1 . 4 | 1 . 3 SDI 12G| 3 G | H D | S D DVI 1.0 HDBaseT 1.0 VGA UXGA				
	Color Space	RGB444 | YUV444 | YUV422				
Power	Input Voltage	AC 110V-260V,50/60HZ				
Environment	Operation Temperature	-0℃~50℃				
	Storage Temperature	-20℃~55℃				


Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.


RGBlink®
www.rgblink.com

Dimensions


FLEX 08L(MINI)

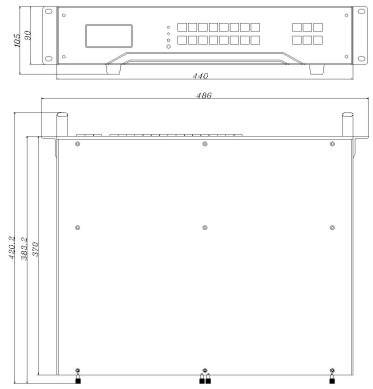


FLEX 16L(MINI)

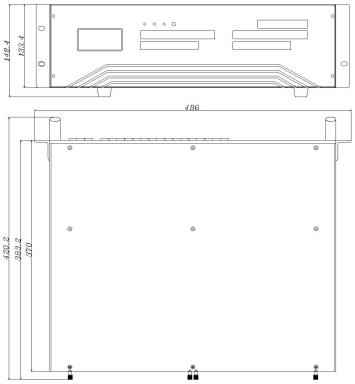


FLEX 36L(MINI)

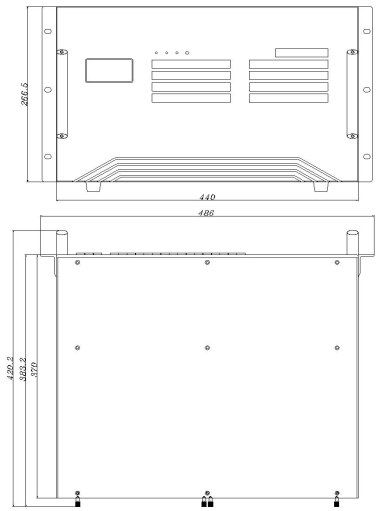

FLEX 80L(MINI)

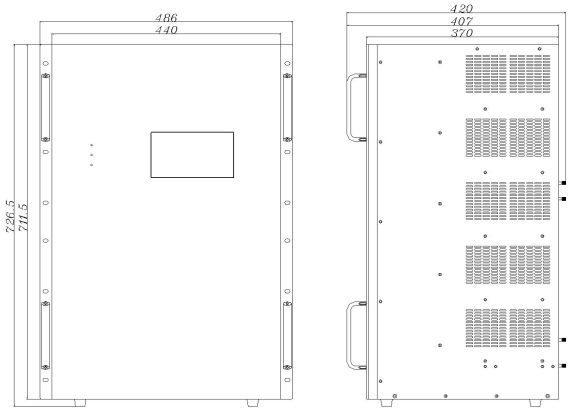

FLEX 160L(MINI)

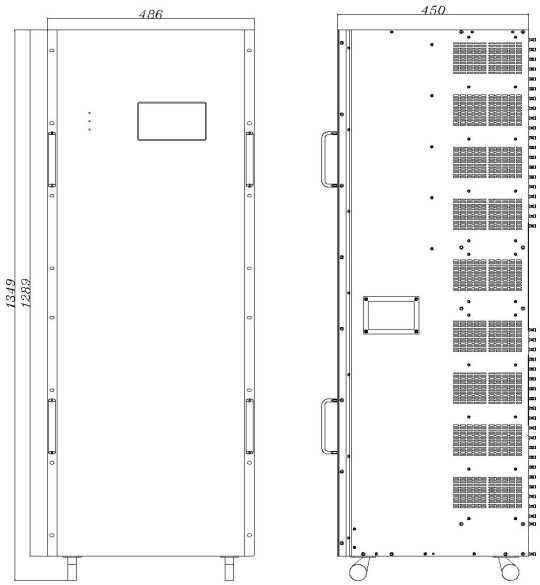

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.