FLEX RS1




Key Features


- 4K@60Hz Input, internal 4:4:4 processing and HDR compliance
- 3 Operation mode: Rotation, Projection, Independent
- Cascade multiple units for additional screens
- Rotate mode
  - Rotate each output independantly in 1 degree increment
  - Position output in pixel space
  - Support for multi-pitch with zoom/scale
- Projection
  - Apply variable edge blending across the 4 outputs in any arrangement
  - Create video walls up to 8Kx1K
- Independent
  - Each output resolution configurable
- Manage with XPOSE on Windows, Mac OS, IOS, Android or Linux

Application

Rotation

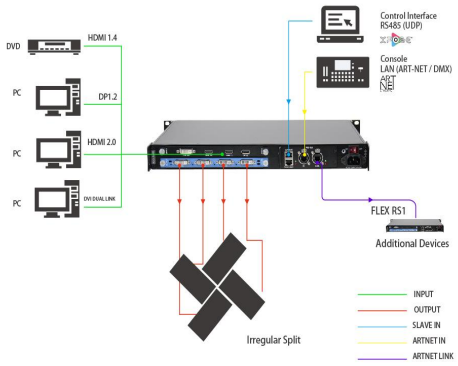


Projection

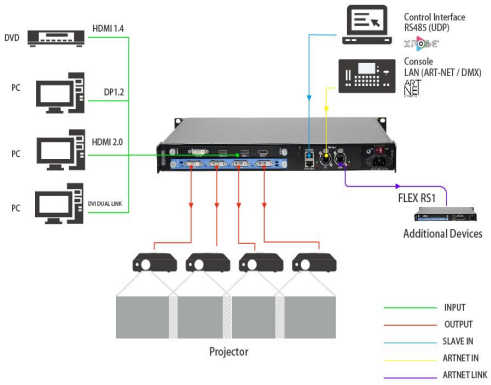

Order Codes

Product Code	Item
700-0001-01-0	FLEX RS1

Dimensions

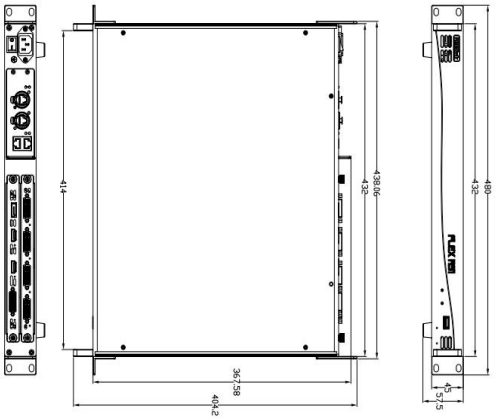

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink®
www.rgblink.com

Specification

Connectors	Input	*1 slots up to 4 inputs*		
		Standard with	4K@60Hz Input Module	1 × DVI | 2×HDMI-A | 1×DisplayPort
	Output	*1slots, up to 4 outputs*		
		Standard with	ARO Rotation Module	4 × DVI-I
	Communication	RS485	Salve In|Out	2× RJ45
		Artnet	In| Link	2× RJ45 （Ethercon）
	Power		1 x IEC	
Performance	Input Resolutions	DVI | HDMI 1.4		
		SMPTE	720p@50/59.94/60 | 1080i@50/59.94/60 | 1080p@50/59.94/60 | 2160p@30	
		VESA	800×600@60 | 1024×768@60 | 1280×720@50/59.94/60 | 1280×800@60 | 1280×960@60 | 1280×1024@60 | 1400×1050@60 | 1600×1200@60 | 1920×1080@50/59.94/60 | 2560x960@60| 3840 x 2160@30	
		HDMI 2.0 | DP 1.2		
		SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 | 1080p@50/59.94/60 | 2160p@30/60	
		VESA	800×600@60 | 1024×768@60 | 1280×768@60 | 1280×800@60 |1280×1024@60 | 1360×768@60 | 1366×768@60 |1400×900@60 | 1600×1050@60 | 1600×1200@60 | 1680×1050@60 | 1920×1080@60 | 1920×1200@60 | 2048×1080@60 | 2048×1152@60 | 2560×812@60 | 2560×960@60 | 2560×1600@60 |3840×1080@60| 3840×2160@30 | 3840×2160@60	
	Output Resolutions	*Select from below or configure customized*		
		DVI		
		SMPTE	720p@50/59.94/60 | 1080i@50/59.94/60 | 1080p@50/59.94/60	
		VESA	800×600@60 | 1024×768@60 | 1280×720@50/59.94/60 | 1280×800@60 | 1280×960@60 | 1280×1024@60 | 1400×1050@60 | 1600×1200@60 | 1920×1080@23.98/24/25/29.97/30/50/59.94/60	
	Supported Standard	DVI	Dual Link	
		HDMI	2.0	
		DisplayPort	1.2	
Power	Input Voltage	AC 90-264V 50/60Hz		
	Max Power	65W		
Environment	Temperature	0℃～40℃		
	Hudmidity	10%~85%		
Physical	Weight	Nett	2.5kg	
		Packaged	5.73kg	
	Dimension	Net	480mm×438mm×404mm	
		Packaged	540mm×460mm×135mm	

**When EXT4F-OS Splicing Output is installed, any HDBaseT input must be configured to 1080p resolution.*

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink®
www.rgblink.com