MSP 204 HDMI to SDI Converter




Key Features

- 3G-SDI, HD-SDI and SD-SDI
- HDMI 1.3 or DVI 1.0
- Embedded audio
- Separate L/R analog or digital AES/EBU audio
- Automatic identification for input format
- DIP switch
- Remote configuration by USB


Specification

Interface	Input	HDMI	1×HDMI-A
	Output	SDI	1×BNC
	Audio	Audio	2×3.5mm Jack
	Power		1 x 5.4mm DC socket
Performance	Input Resolution	HDMI	
		SMPTE	480i | 576i | 720p@50/50.94/60 | 1080i@50/59.4/60 | 1080p@23.98/24/25/29.97/30/50/59.94/60
	Output Resolution	SDI	
		SMPTE	480i | 576i | 720p@50/50.94/60 | 1080i@50/59.4/60 | 1080p@23.98/24/25/29.97/30/50/59.94/60
	Supported Standards	HDMI	1.3
		SDI	ITU-R BT.656,ITU-R BT.601,SAMPTE 259M,SAMPTE 292, SAMPTE 297
Power	Input Voltage	12V DC (via universial Plug Pack)	
	Max Power	1.5A	
Environment	Temperature	0~45℃	
	Humidity	10% ~85%	
Physical	Weight	Net	0.19kg
		Package	0.48kg
	Dimension	Net	98mm×92.9mm×23.5mm
		Package	170mm×120mm×80mm

Application

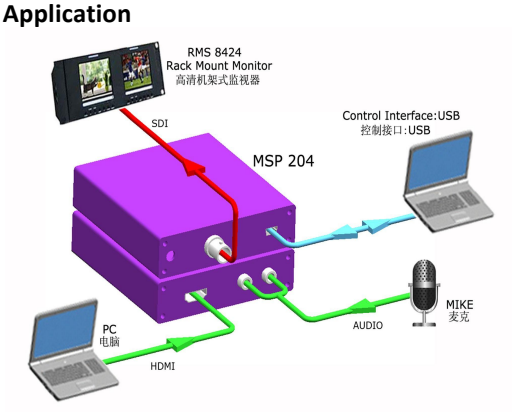

Dimension

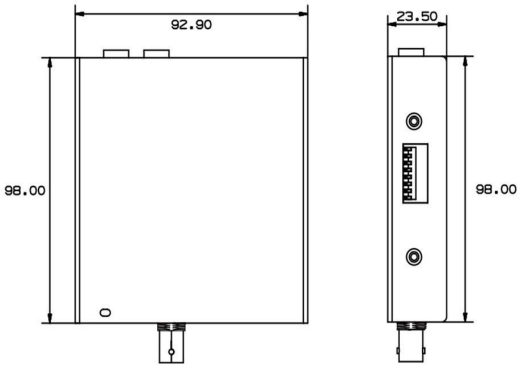

Order Codes

Order Code	Item
600-0204-01-0	MSP 204 HDMI | SDI

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink®
www.rgblink.com