# MSP 231S
# SDI Capture Card



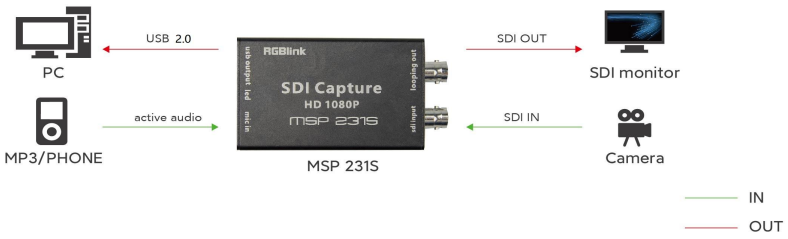

## Key Features

- Transform SDI input signal to USB output signal
- UVC/UAC standard
- Capture resolution up to 1920×1080
- MIC synchronous audio input
- Plug & Play – no drivers required
- Compatible with OBS, POTPLAYER, AMCAP, VLC software
- No additional power supply required

## Specification

| | | | |
|---|---|---|---|
| **Interface** | Input | SDI | 2×BNC (1 IN |1 LOOP) |
| | Output | USB 2.0 | 1×USB-B |
| | Audio | MIC IN | 1×3.5mm Audio Jack |
| **Performance** | Input Resolution | SDI<br>720P23.98/24/25/30 | 1080P23.98/24/25/30/50/59.94/60 |
| | Output Resolution | USB 2.0<br>1920x1080 \| 1600x1200 \| 1360x768 \| 1280x1024 \| 1280x960 \| 1280x720 \| 1024x768 \| 800x600 \| 720x480 \| 720x576 \| 640x480 | |
| | Frame Rate | 5-60 frames adjustable | |
| | AV Capture | Standard UVC/UAC | |
| | Driver | Plug & Play – no drivers required | |
| | Operation System | Windows/Linux /Android | |
| | Capture Software | OBS/Potplayer（Windows） | |
| | Sampling | YUV 4:2:2 | |
| | Color Space | 8bit | |
| | Supported Standards | SDI | Dual link，Level A |
| | | USB | 2.0 |
| **Power** | Power Consumption | ＜3W | |
| **Working Environment** | Temperature | -20℃~60℃ | |
| | Humidity | 5%~90% | |
| **Physical** | Weight | 0.1kg | |
| | Dimension | 87mm (10mm BNC interface included） x 51mm x 21mm | |

## Application




## Order Codes

| Product Code | Item |
|---|---|
| **601-0231-01-0** | **MSP 231S** |

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

*Specifications are correct at time of printing and subject tochange or alteration without notice.*

RGBlink®
www.rgblink.com