UTP Cat5e




Key Features

- Durable break-resistant connector
- Copper terminals with anti-oxidation Nickle & Gold plating
- Easy to see florescent connector boot
- Extra wide latch for quick connection/removal
- Dual PVC jackets with high strength and heat resistance
- Pure copper wire core , each formed by 7 independent wire to conduct with low resistence
- 50um plating connectors durable over 1000 repeated plug and unplug
- Velcro strap for easy storage


Specification

Conductor	Wire Guage	24AWG		
	Material	Bare Copper Twisted Pair		
	Cord Size	7/0.2/BC±0.008		
Insulation	Avg.Thickness	0.19mm		
	Min.Thickness	0.16mm		
	Material	HD-PE		
	Color	Blue*White/Blue,Orange*White/Orange,Green*White/Green,Brown*White/Brown		
	Diameter	0.98 ± 0.05mm		
Jacket	Avg.Thickness	0.5mm		
	Material	100P PVC		
	Color	Matte Black		
	Diameter	6.5 ± 0.2mm		
Physical	Weight	1.2m	0.068kg/pcs	3.65kg/(Pack:50pcs)
		1.5m	0.082kg/pcs	3.65kg/(Pack:40pcs)

Cross Section



Connectors Dimension

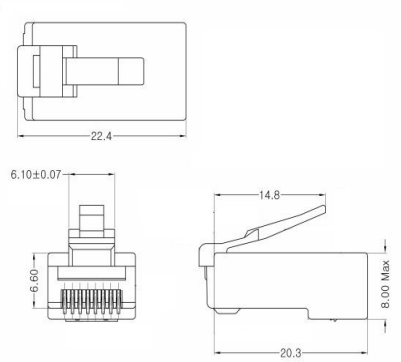

Order Codes

Product Code	Item
940-0000-27-11-1	0.27m UTP Cat5e Cable
940-0000-30-11-1	0.3m UTP Cat5e Cable
940-0000-50-11-1	0.5m UTP Cat5e Cable
940-0000-80-11-1	0.8m UTP Cat5e Cable
940-0001-00-11-1	1.0m UTP Cat5e Cable
940-0001-20-11-1	1.2m UTP Cat5e Cable
940-0001-50-11-1	1.5m UTP Cat5e Cable
940-0003-00-11-1	3m UTP Cat5e Cable
940-0005-00-11-1	5m UTP Cat5e Cable
940-0010-00-11-1	10m UTP Cat5e Cable
940-0015-00-11-1	15m UTP Cat5e Cable
940-0020-00-11-1	20m UTP Cat5e Cable

Product Code	Item
940-0025-00-11-1	25m UTP Cat5e Cable
940-0030-00-11-1	30m UTP Cat5e Cable
940-0035-00-11-1	35m UTP Cat5e Cable
940-0040-00-11-1	40m UTP Cat5e Cable
940-0045-00-11-1	45m UTP Cat5e Cable
940-0050-00-11-1	50m UTP Cat5e Cable
940-0060-00-11-1	60m UTP Cat5e Cable
940-0070-00-11-1	70m UTP Cat5e Cable
940-0080-00-11-1	80m UTP Cat5e Cable
940-0090-00-11-1	90m UTP Cat5e Cable
940-0100-00-11-1	100m UTP Cat5e Cable

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink® www.rgblink.com