Q4L




Key Features

- Modular design with flexible input & output combinations
- Custom output resolutions
- Support up to 8 layers
- Independent display management control
- Custom EDID
- Control via XPOSE 2.0 or RGBlink OpenAPI

Application



Dimensions

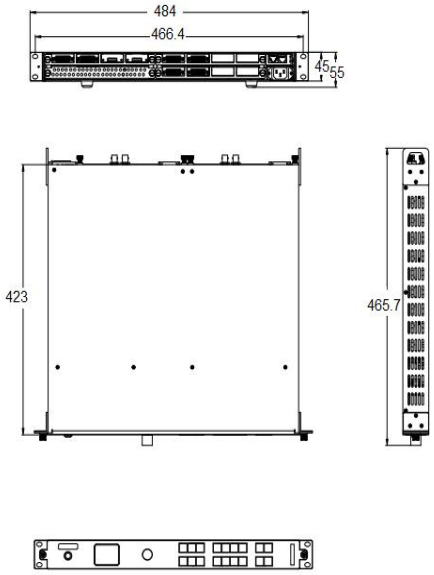

Order Codes

Product Code	Item
712-0004-01-0	Q4L
190-0001-07-2	Single 3G SDI Input/Loop Module
190-0001-15-2	Single HDBaseT Input Module
190-0001-10-2	Single USB2.0 Input/Backup Module
790-0004-02-0	4K@60 Input Module

Product Code	Item
790-0004-01-0	Single HDMI (Sync) Input/Loop Module
190-0001-06-4	HDMI Input Module
190-0001-04-2	DVI Input Module
980-0004-01-0	EXT 4F-IM Matrix Input Interface
790-0004-21-0	Single DVI (Sync) Output Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgblink.com

Specification

Connectors	Input	*2 slots, up to 8 inputs*		
		Standard with	HDMI 1.3 Module	2×HDMI-A(1 In/1 Loop)
			DVI Module	2×DVI-I
		Optional, select from	Dual DVI | HDMI 1.4 | HDMI 2.0 | DP 1.2	1×DVI-I | 2×HDMI-A | 1×DP
			3G SDI Module	1×BNC (1 In/1 Loop)
			HDBaseT Module	1×RJ45
			USB Module	1×USB-A (1 In/1 Backup)
			HDMI1.3 Module	1×HDMI-A（1 In/1 Loop）
			DVI Module	1×DVI-I
	Output	*Standard with*	DVI Module	4×DVI-I （DVI only）
	Communication		LAN	1×RJ45
			RS 232	1×RJ11
	Power			1×IEC
Performance	Input Resolutions	SDI		
		SMPTE	480i | 576i | 720p@50/60 | 1080i@59.94/60 | 1080p@50/59.94/60	
		DVI | HDBaseT		
		SMPTE	480i | 576i | 720p@50/59.94/60 | 1080i@50/59.94/60 | 1080p@50/59.94/60	
		VESA	800×600@60 |1024×768@60 | 1280×768@60 I 1280×1024@60 | 1600×1200@60 | 1920×1080@60 | 1920×1200@60 | 2048×1152@60	
		DP		
		VESA	800×600@60 | 1024×768@60 | 1280×1024@60 | 1440×900@60 | 1600×1200@60 | 1920×1080@60 2560×1440@60 | 3840×2160@60	
		HDMI		
		SMPTE	480i | 576i | 720p@50/59.94/60 | 1080i@50/59.94/60 | 1080p@50/59.94/60 | 2160p@50/60	
		VESA	800×600@60 | 1024×768@60 | 1280×1024@60 | 1440×900@60 | 1600×1200@60 | 1920×1080@60 | 3840×2160@60 | 4096×2160@60	
	Output Resolutions	*Select from below or configure customized*		
		DVI		
		SMPTE	720p@50/59.94/60| 1080p@50/59.94/60	
		VESA	800×600@60 | 1024×768@60 | 1280×720@50/59.94/60 | 1280×800@60 | 1280×960@60 | 1280×1024@60 | 1400×1050@60 | 1600×1200@60 | 1920×1080@60 | 2048×1152@60	
	Supported Standards	SDI	3G	
		HDMI	2.0	
		DVI	Dual Link	
		DisplayPort	1.2	
		HDBaseT	1.0	
Power	Input Voltage	AC 85V-264V, 50/60Hz		
	Max Power	65W		
Working Environment	Working Temperature	-5℃～45℃		
	Working Humidity	10%~85%		
Physical	Weight	Net	8.5kg	
		Packaged	9.5kg	
	Dimension	Net	484mm×466mm×45mm	
		Packaged	635mm×545mm×135mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.