NO.622S



Outdoor Digital Menu Board

Sunlight Readable

Brightess is paramount when using outdoor screens these displays use commercial grade IUlta High Brightness panels (2,500 cdm²) ,more than 5 times brighter than a standard home TV to allow easy readabity in direct sunlight The dispiay also has an ambient lit sensor that ill aer the screens brightness based on the displays surrounding light levels.This leave sthe screen with the best clarity while also conserving energy

Outdoor Enclosure

Designed with robust, corrosion protected, casing to protect against the elements and the public. With an IP65 rating, it keeps out all airborne particles as weel as being protected from any wet weather conditions and also feature waterproof over molded AV connectors. The enclosures are made from mild steel and have thermally toughened glass.

Temperature Control

The military superconducting heat dissipa-tion technology can be used to export the heat of the whole machine to the outsideworld at the fastest speed; ensuring a long and reliable life for your display.

Auto brightness control

Integrated high sensitive sunlight sensor inside, it would change the brightness of the panel automatically.

Sync Display Function

With our android solution, our outdoor digital menu board disaplay would split the content with sync function.

Network CMS Upgrade

We also offer cloud basis network CMS if required,and you can run the third party Digital Signage software viaour Android PC board too.

Sturdy Enclosure

Made from mild steel,the enclosure is strong enough to protect the displays components from outside harm such as vandals.

Touch Screen Upgrade

An IP65 Rating means the display is able to withstand all weather conditions, wet and dry and also features waterproof over molded HDMI connectors.

Sunlight Readable | 24/7Usage | Industrial standard | Android Media Player | Integrated Temperature Control | Vandal Proof | Fan-less design | Water Proof

Product Advantages

Outdoor advertising player digital signage Waterproof & Lightning protection LCD display screen



Product Features



2,500 cd / m² High Brightnes

Screen would get up to 2,500nits makes the screen is readable even under the strong sunlight.



Weather Proofing

Designed for outdoor purpose, all weather proofing!




Anti-glare Tempered Glass

Strong anti-glare tempered glass will ensure passenager would not see the reflected light anytime from any angle.



Excellent heat dissipation

The military superconducting heat dissipa-t ion technology can be used to export the heat of the whole machine to the outside world at the fastest speed.

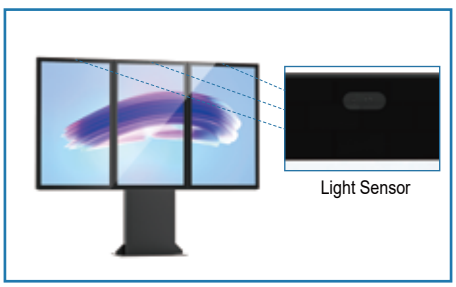

Auto Brightness Control

Brightness would be auto adjust via the ambient light



10 Watt Loudspeaker


Six 8 ohm 10 watt outdoor use loudspeaker on the side, ensure passengers could hear what you want they hear.

Specifications

Model			NO.622S		
Panel	Display Size(inch)		43"	49"	55"
	Resolution		1920x1080	1920x1080	1920x1080
	Active Display Area(mm)		941.2 x529.4	1073.5 x 603.0	1209.6 x 680.4
	Aspect Ratio		16:09	16:09	16:09
	Brightness(cd/m2)		2500nit	2500nit	2500nit
	Contrast Ratio(Typ.)		1000:1	1000:1	1000:1
	Viewing Angle(H/V)		178/178	178/178	178/178
	Color		16.7M	16.7M	16.7M
	Response Time(G-to-G)		6ms	6ms	6ms
	Operation Hour		24/7	24/7	24/7
Sound	Loud Speaker		5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type		Internal	Internal	Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %),50/60 Hz		
	Power Consumption	Max[W/h]	100	120	150
		Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
		Off mode	less than 0.5W	less than 0.5W	less than 0.5W
Mechanical Spec	Protection Glass		Yes	Yes	Yes
	Stand Type		Floor standing	Floor standing	Floor standing
Environmental	Screen Working Temperature		-10°C ~ 80°C	-10°C ~ 80°C	-10°C ~ 80°C
	Operating Environment Temperature		-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C
	Operating Humidity		10% ~ 80 %	10% ~ 80 %	10% ~ 80 %
	Storage Humidity		5% ~ 95%	5% ~ 95%	5% ~ 95%
	Cooling System		Powerful Turbofan & cross flow fan/Air condition (Optional)		
	Hypothermia protection		Heater (aluminium sheet warmer) (Optional)		
OS	Android Media Player	Processor	T972 (1.9GHz， octa core)		
		RAM	2G		
		Flash	16G		
		USB	USB2.0 HOST(X2)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8G/16G/32G/64G		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	1920*1080 (4K resolution available for some size by request.)		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
		Operating System	Android 9.0		
Certifi cation	Safety		CE ROHS IP65		
Accessories	Included		Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance		1 year (2-3 years optional)		
	Type of packaging		Carton box /honeycomb box + wooden case		

Screenage

PEOPLE WHO PRODUCE RESULTS. THAT'S US!



FACTORY



EXHIBITION HALL



WAREHOUSE

COMPANY PROFILE

- Company Name: Screenage Technology
- Established in **2008**
- Focus area: Commercial LCD Display Product Development
- 10-Year Professional Manufacturer in Shenzhen,China
- Factory Total Area: **3000m²**
- Output: **100,000Pcs/Year**
- Product Range: Digital Signge, LCD Video Wall, Floor Standing Kiosk, Industrial LCD Monitor, All-in-one PC and LCD Interactive Whiteboard.
- Main Market: North America,Western Europe,Mid East,Eastern Europe, South America,Africa
- Certificate: **ISO9001,CE,EMC,RoHS**

Have questions?

We have answers!

Get answers about Pricing,Specifications,Installation,and more

CONTACT US NOW!

E-mail: info@screenage.com

www.screenage.com