DP WM
DP series
Wall-mount dimmer



16/32-channel wall-mount dimmer pack DP WM is a perfect device for the use with **100/200W light bulbs**. With the total unit maximum current of 16A and the **phase-angle control via triacs** and **in-line filter**, **DP WM** is a reliable dimmer that suits several lighting applications.


It also provides **100% duty cycle**, **conventional cooling**, **automatic warning at selected temperature** as well as **automatic shutdown at critical temperatures**.

Housing, dimensions & weight:

Steel housing with gray powder coating

- **DP16 WM: 309 x 319 x 93mm 6.2kg**
- **DP32 WM: 560 x 319 x 93mm 7.5kg**

- **DMX-controlled** dimmer pack
- **16/32 independent channels**
- Main voltage: **1x 230V/16A**
- Minimum Load: **30W**
- Maximum Load: **200W** 16 channels
- Maximum Load: **100W** 32 channels
- Input connectors: **DMX 3- or 5-pin**
- Output connectors: **WAGO Terminal box with OUT, PE, N** **PowerCon NACMPB-1**

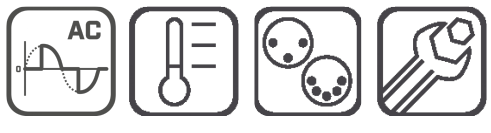

Variants

WAGO output

- *906002* DP32-WM WAGO out
- *906001* DP16-WM WAGO out

NAC3MPB-1 output + DMX XLR in/out

- *906011* DP32-WM-NAC NAC3MPB-1 on TOP out
- *906010* DP16-WM-NAC NAC3MPB-1 on TOP out
- *906012* DP16-WM-NAC-SIDE NAC3MPB-1 on SIDE out

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com

1PH Power Cable


UNI-Schuko Type F-1,5m

DMX connector


Screw Terminal

1PH outputs


NAC3MPB-1


WAGO


Related products



DP1



DP3

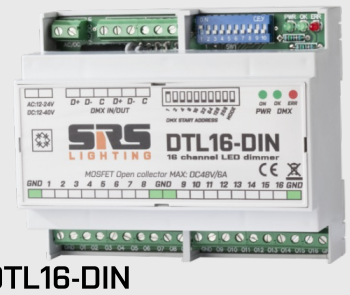

DTL16-DIN

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com