TS
TS series
Touring System




Touring systems from SRS Group are designed as a modular system to provide an affordable and plug-and-play solution for touring.

Systems come with **up to 96 channels of dimming / hot power**. The base of the touring systems is the **power distribution** unit with optional metering completed with the **NDPseries** or **series400** dimming units.

Variable patch panels fit easily to the back or the top of the unit.

Output options:

- **12x CEE16 4p**
- **HARTING 6**
- **HARTING16**
- **HARTING 24**
- **Socapex 19**
- **Optional outputs according to specification**

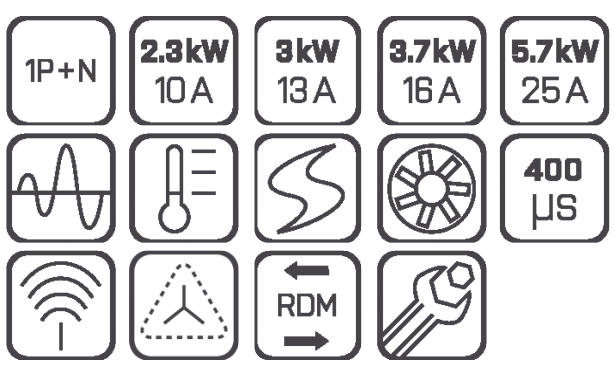

- **12, 24, 36, 48** or **96-channel dimming systems**
- **Drawer** for additional storage place
- Optional **breakout boxes** installed in covers
- Input: **CEE / POWER-LOCK / TWIST-LOCK**
- Power: **AC 3x230V/400V, 50-60Hz**

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com

DDP/NDP output


K1: 1x HARTING 24 (PH:1-12, N:13-24)


K2: 2x HARTING 16 (PH:1-6, N:9-14, NC:7+8+15+16)


K3: 2x Socapex 19


K9: 4x HARTING 16 (PH:1-6, N:9-14, NC:7+8+15+16)


K10: 2x HARTING 16 (PH:1,3,.., N:2,4,..., NC:13-16)


K11: 2x HARTING 6


K12: 2x HARTING 6 (PH, N - in round)


K13: 12x CEE16/3p


K14: 6x CEE32/3p

Related products


NDP12


DDP12


DDP61


DSR8W (PRO)

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

SRS Group s.r.o.
Pri majeri 4, 831 07 Bratislava, Slovakia
phone: +421 232 661 800, email: sales@srs-group.com, www.srs-group.com