ASK 4


4K Wireless Video Transmission System



Key Features

- HDMI Input and Output up to 4K@30Hz
- Line-of-Sight (LOS) Wireless Transmission Range up to 1500 ft/450 m
- 1.47-inch Display for Real-Time Signal Monitoring
- 20 Selectable Frequency Channels
- UVC Output up to 1080p60 for OBS and Other Streaming Software
- 3.5mm Audio Output
- Supports NP-F970/NP-F550 Series Batteries and USB-C Power Input
- One TX Supports up to Five RX

Application

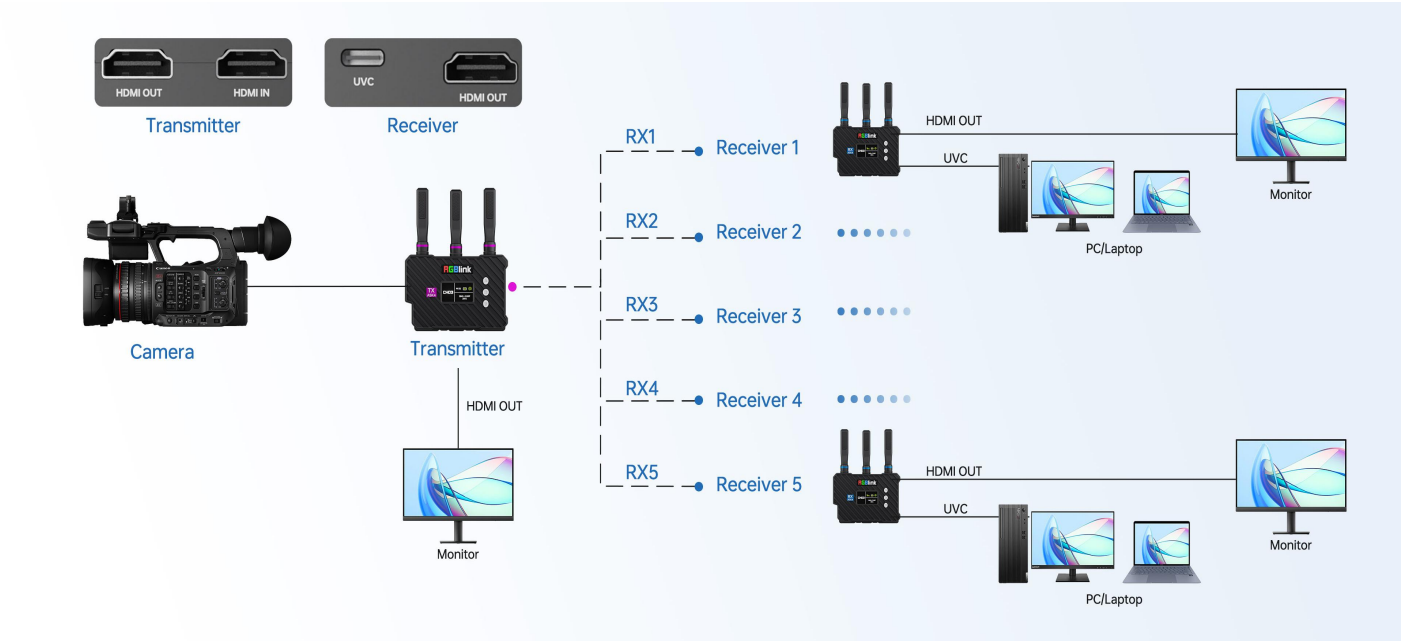

Order Code

Product Code	Item
450-4003-01-1	ASK 4 (1TX+1RX)
450-0005-02-0	ASK 4 RX (2R)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgblink.com

Specification

Interface	Input	TX	HDMI IN	1 × HDMI-A	
	Output	TX	HDMI LOOP OUT	1 × HDMI-A	
		RX	HDMI OUT	1 × HDMI-A	
			UVC OUT	1 × USB-C	
	Audio	TX	AUDIO Out	1 × 3.5mm Jack	
		RX	AUDIO Out	1 × 3.5mm Jack	
	Power Input	TX/RX	DC IN	1 × USB-C	
		TX/RX	Battery (not included)	1 × NP-F Battery Plate	
	Reset	TX/RX		1 × Pinhole	
Performance	Input Resolution		HDMI IN	Up to 3840×2160P@30Hz	
	Output Resolution		HDMI OUT	3840×2160P@30Hz | 1920×1080P@60Hz	
			HDMI LOOP OUT	3840×2160P@30Hz | 1920×1080P@60Hz	
			UVC OUT	USB 3.0	YUY2|MJPEG 1920×1080P@60Hz
				USB 2.0	YUY2|MJPEG 1920×1080P@30Hz
	Video Codec		H.265		
	Latency		≤0.1 s		
	Bitrate		60 Mbps		
	Wireless Frequency		5 GHz		
	Max RX per TX		5		
	Transmission Distance		1TX to 1RX	1500 ft/450 m (MAX)	
			1TX to 3RX	990 ft/300 m	
			1TX to 5RX	656 ft/200 m	
	Device Compatibility		PC/Laptop/PS4/PS5/TV Box/Camera		
Power	Input Voltage		5V2A		
	NP-F series battery runtime (battery is not included)		NP-F970 7800 Mah	TX: 12 h/RX: 13 h	
			NP-F750 4400 Mah	TX: 9 h/RX: 10 h	
			NP-F550 2600 Mah	TX: 5 h/RX: 5.5 h	
Physical	Display		1.47-inch LCD		
	Water Resistance		N/A		
	Housing Material		PC + ABS + Metal		
Dimension	Net Dimension		108.5 × 69.7 × 27.2 mm		
	Package Dimension		200 x 180 × 100 mm		
	Package Weight		990 g		

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.